

Post Available Copy

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : **H03J 7/16** **A1** (11) International Publication Number: **WO 98/01949**
(43) International Publication Date: **15 January 1998 (15.01.98)**

(21) International Application Number: **PCT/SE97/01125**
(22) International Filing Date: **23 June 1997 (23.06.97)**
(30) Priority Data: **9602740-4** **10 July 1996 (10.07.96)** **SE**
(71) Applicant: **ALLGON AB [SE/SE]; P.O. Box 500, S-184 25 Åkersberga (SE).**
(72) Inventors: **LARSSON, Lennart; Rosendalvägen 5, S-184 50 Åkersberga (SE). FOLKESSON, Rolf; Lövhämsa, S-186 97 Bröttby (SE).**
(74) Agents: **SVAHN, Stefan et al.; Axel Ehmers Patentbyrå AB, P.O. Box 10316, S-100 55 Stockholm (SE).**

(81) Designated States: **AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).**

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: **METHOD AND SYSTEM FOR TUNING RESONANCE MODULES**

(57) Abstract

A method and a system for tuning a resonance module in a radio base station are disclosed. The resonance module has tuning means, a transmitter connection, and an antenna connection. High-frequency input and output signals on the transmitter and antenna connection, respectively, are sensed and processed to tune the resonance module to a frequency of the input signal on the transmitter connection. The processing of the sensed input and output signals includes processing in a low-frequency range. Prior art methods are improved by the invention through the use of a quadrature modulator to increase adjustment speed and overall applicability of the resonance module to be tuned.

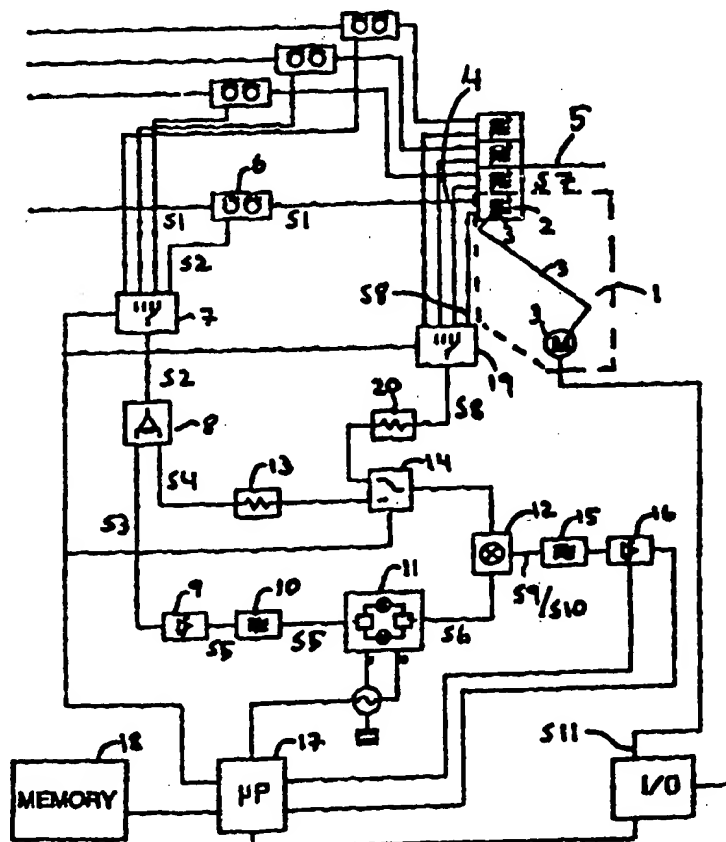

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD AND SYSTEM FOR TUNING RESONANCE MODULES

FIELD AND BACKGROUND OF THE INVENTION

5 The present invention relates to a method and a system for tuning a resonance module in a radio base station, said resonance module having tuning means, a transmitter connection, and an antenna connection. High-frequency input and output signals on the transmitter and antenna connection,
10 respectively, are sensed and processed to tune the resonance module to a frequency of the input signal on the transmitter connection. The processing of the sensed input and output signals includes processing in a low-frequency range.

15 Such an arrangement for tuning resonance modules is disclosed in the published PCT Application No. SE92/0004. That resonance module includes a resonant cavity and a resonance body, the position of which is adjustable by means of a motor to control the resonance frequency of the resonance module. As long as
20 there is a phase difference between high-frequency input and output signals of the resonance module, the arrangement adjusts the position of the resonance body so as to reduce that phase difference. This prior art arrangement includes a voltage controlled oscillator that generates a high-frequency signal
25 which is mixed with the input signal and the output signal in first and second mixers, respectively. Thus, two low-frequency signals are formed, the phase difference of which is a measure of a mistuning of the resonance module. Dependent thereon, the resonance module is tuned by means of the motor to a correct
30 resonance frequency being the frequency of the input signal of the resonance module.

However, in this prior art arrangement, the voltage controlled oscillator is a relatively complicated and expensive component,
35 which is required to have high dynamic performance since a relatively wide frequency range has to be scanned in the prior art tuning method.

SUMMARY OF THE INVENTION

One object of the present invention is to provide a method for tuning a resonance module, which method reduces the time required for tuning the resonance module in response to variations in the frequency of an input signal of the resonance module. Further objects of the invention are to provide an efficient and accurate method wherein plural resonance modules can be tuned in a sequential process or in parallel processes, wherein multiplexing can be used to reduce required circuitry, wherein a VCO may be omitted, wherein a particularly efficient self-test and adjustment routine can be used in production as well as in operation, and/or wherein a low-frequency signal is efficiently generated, and to provide an efficient and cost-effective system for tuning a resonance module, in particular, for carrying out the method according to the invention.

These and other objects are attained by a method or a system according to the appended independent claims.

Advantages of embodiments of the inventive method and system are that different sensing may be performed in the same branch of the circuitry of the system leading to a reduction of possible measurement errors; that very fast "frequency hopping" may be performed if a fast tuning means is applied in the regulation system of the invention, that only the phase relation between the transmitter signal and the antenna signal remains in the low-frequency signal resulting in independence of the presently employed modulation width. It is possible in the inventive method and system to lower requirements on some major components to be connected to the resonance modules while still improving the tuning performance.

In particular, the inventive method comprises the steps of: mixing an input signal, which is originating from a transmitter signal present on the transmitter connection, with a low-frequency signal so as to generate a single side band signal; mixing with the single side band signal an output signal being

offset in phase from the input signal by a relative first phase difference dependent on a present tuning of the resonance module, said output signal being one in a group consisting of: a split portion of an antenna signal present on the antenna connection and a signal probed within the resonance module; mixing with the single side band signal a split portion of the transmitter signal on the transmitter connection; comparing, at a frequency range about the frequency of the low-frequency signal, mixing products resulting from the mixing of the single side band signal with the input and output signals, respectively, so as to determine a relative second phase difference between the input and output signals; operating, based on said second phase difference, the tuning means to tune the resonance module in order to adjust said second phase difference to a predetermined value or to be within a predetermined value range, so as to tune the resonance module to a present frequency of the input signal.

The inventive method and system are applicable to any type of resonance modules including, but not limited to, cavity resonators, half-wave or quarter-wave resonators, and wave-guide resonators.

Further advantageous developments of the invention is set forth in the dependent claims and the detailed description below.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block diagram of a resonance module tuning system including a single-side-band generator, Fig. 2 shows a sine-cosine signal generator used by the single-side-band generator of the tuning system of fig. 1.

DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

With reference to fig. 1, a depicted combiner unit intended for a base station in, e.g., a PCS mobile telephone system, is provided with one embodiment of the invention. In the combiner

unit, four tunable resonance modules are arranged to be connected to four transmitter outputs via four respective isolators and to a transmitting antenna.

5 An improved system for tuning a first resonance module 1 comprises a tunable resonator 2 having tuning means 3, a transmitter connection 4, and an antenna connection 5. The system further comprises an isolator 6, which includes two circulator
10 elements and a first sensor for sensing a transmitter signal S1 from a transmitter, passing the isolator 6, to the transmitter connection 4 of the resonance module 1. The first sensor in the isolator 6 produces an input signal S2 that is essentially a small fraction of the transmitter signal S1.

15 The input signal S2 is fed via a first multiplexer 7 to be described further below to a power splitter 8, which splits the input signal in signals S3 and S4. The signal S3 is fed via a limiting amplifier 9 and a band-pass filter 10, producing a
20 signal S5 which is input to a quadrature modulator (single-side-band generator) 11, known per se, wherein the signal S5, still being a measure of the transmitter signal S1, is mixed with a low-frequency (intermediate frequency) signal in immediate (0°) and quadrature (90°) phases I and Q,
25 respectively. The output signal S6 of the quadrature modulator is a single side band of the mixing product of signal S5 derived from signal S1 and the low-frequency signal. Consequently, a frequency of signal S6 is always offset from
30 signal S1 by the frequency of the low-frequency signal, the latter being constant. Further, a phase of signal S6 is always offset from that of signal S1 by a constant phase difference. Signal S6 is fed from the quadrature modulator 11 to a mixer
12.

35 Signal S4 is fed from the power splitter 8 via an attenuator 13 and a second multiplexer 14 to the mixer 12. The mixer 12 thus produces from signals S6 and S4 a mixing product signal S9 which is fed via a low-pass filter 15 and a second limiting amplifier 16 to a signal processing means 17 wherein the phase

of the mixing product signal S9 is measured and stored in a memory 18.

5 The system further includes a second sensor arranged inside the resonator 2 for sensing an antenna signal S7 to produce an output signal S8, which is to be compared to signal S2 in order to determine a relative phase difference. That phase difference is a measure of a relative difference between a frequency of the transmitter signal and the frequency to which the resonance
10 module is presently tuned. Signal S8 is essentially a small fraction of the antenna signal S7. Alternatively, the output signal could be sensed on the antenna connection 5 to produce a signal to be used instead of signal S8. In that case, signals originating from other transmitters would be more of a problem.
15 For an ideal tuning of the resonance module, the phase difference between the transmitter signal on the transmitter connection 4 and the antenna signal on the antenna connection 5 is zero.

20 Signal S8 is fed from the second sensor via a third multiplexer 19 to be described further below, an attenuator 20, and the second multiplexer 14, which is alternately switched to connect either signal S4 or signal S8, to the mixer 12. When the multiplexer 14 connects signal S8, the mixer 12 thus produces from
25 signals S6 and S8 a mixing product signal S10 which is fed via the low-pass filter 15 and the second limiting amplifier 16 to the signal processing means 17 wherein the phase of signal S10 is measured and stored in the memory 18. The stored phase measurements are then compared to determine the phase
30 difference between signals S9 and S10.

Of course, the real time difference between the measurements is known and determined by the signal processing unit 17. The sequence of connecting signals S4 and S8 by the second multiplexer 14 is not critical to the measurement principles.
35 However, starting a measuring cycle by connecting signal S8 is preferred. Alternatively, the measurements of signals S4 and S8

could be made in separate branches with corresponding changes in the circuitry, avoiding the use of the multiplexer 14.

5 The signal processing means 17 operates by fast and accurate measurement and regulation of the phase of the transmitter signal S1 relative to the phase of the antenna signal S7. Inherently, the phase measurement performed in the signal processing unit 17 involves an essentially constant additive phase difference dependent on signal delay in the circuitry of
10 the system. However, that inherent phase difference is compensated for by calibration, so that the relative phase difference measured between signals S9 and S10 is adjusted to a predetermined value at which the resonance module is tuned to a present frequency generated by the respective transmitter.

15 In the system depicted in fig. 1 and described above, the first and third multiplexers 7 and 19 are controlled by the signal processing unit 17 so as to share the same regulation circuitry between four essentially identical resonance modules forming a
20 combiner unit with four separate transmitter connections and one common antenna connection. The adjustment of the remaining three resonance modules is performed essentially the same way as indicated above with reference to the first resonance module 1. The number of resonance modules in the combiner unit may
25 differ from that of this embodiment.

The signal S2 needs to be well isolated from, e.g., any interfering signals possibly present on the common antenna connection. Thus, the first sensor is arranged to the
30 transmitter side of the isolator 6. Therefore, also in the prior art, an isolator, like the one referred to by the numeral 6, is typically a rather complicated and costly component, which is required to have a very well defined signal delay from its input connection to its output connection, in order for a
35 corresponding regulation circuitry to be shared between plural resonance modules.

Therefore, in a second embodiment of the invention, an additional third sensor is provided between each isolator and the respective resonance module, for sensing a signal corresponding to signal S4 above. Further, the multiplexer 7 is omitted and a signal corresponding to signal S2 from the first sensor above is fed directly to a limiting amplifier corresponding to amplifier 9 above. Likewise, the third multiplexer 19 is omitted and an output signal sensed in the respective resonance module is fed directly to an attenuator corresponding to attenuator 20 above. Thus, major parts of the regulation circuitry is provided separately for each resonance module, although they have a common signal processing and control unit. In this second embodiment of the invention, a much less complicated isolator may be used, since a relative difference between signal delays in the different isolators would have to be neither well defined, nor constant with regard to, e.g., variations in ambient temperature.

In the described embodiments, an electrical step motor, controlled by a signal S11 from the signal processing unit, performs adjustment of a first resonance module by moving via a mechanical link a tuning element in the resonator of the resonance module. The motor sets a limit to the speed of adjustment of the resonance module. In case the transmitter operates at a present frequency, but transmits intermittently, the speed of movement of the tuning element may be, e.g., divided by two every time the motor changes direction of movement, so as to arrive at resonance more efficiently. Moreover, the described regulation principles of the invention could be applied even more efficiently if faster means than step motors could be used to adjust the resonance of the resonance module.

The limiting amplifier 16 depicted in fig. 1 may also generate a radio signal strength indicator (RSSI) signal. That signal may be fed to the signal processing unit 17 and serve as an indicator of whether there is a signal present on the respective transmitter connection which is strong enough for

measuring. Moreover, it may serve as a coarse measure of the adjustment of the resonance module.

5 With reference to fig. 2, a signal generator for providing the single-side-band generator with sine and cosine signals, extensively free of overtones, comprises first and second reversible shift registers 301, 302. Each shift register has eight outputs, which are each connected to one side of a respective resistor. The other side of the resistors are inter-
10 connected at 303, 304 and fed via a smoothing filter and a sixteenth-overtone filter (not shown) to the respective one of the I and Q inputs of the quadrature generator(s) referred to above. A clock signal 305 of the signal processing unit 17 (fig. 1) is input to a divider 306 which feeds at a first
15 output, having a relative frequency of 1:1, clock pulses to clock inputs of the shift registers 301, 302. Second and third outputs, having relative frequencies 1:8 and 1:16, of the divider 306 are fed via EXOR gates 307, 308, 309, in such a manner that ones (1) are shifted into the shift registers 301,
20 302 with a relative difference of four clock pulses (corresponding to 90°) until the respective shift register is filled with ones (1) and, then, changing the direction of shifting, zeros (0) are shifted into the shift registers from the other direction, still with a four pulses relative difference. Values
25 of the resistors are selected so that the generated sine and cosine signals are distorted by less than approximately 2%. Due to this way of generation, the signals have a very well defined relative phase difference of 90° , which is needed in the quadrature modulator 17 (fig. 1). The frequency used in the
30 invention may be in the range of 50 kHz.

A preferred automatic test and calibration/adjustment routine for the inventive system, which can be applied both in
35 production and when the resonance modules are installed for operation, may include the steps of: Bringing all tuning means to a predetermined starting position, preferably an end position outside an operating frequency range so that interconnected resonance modules do not disturb one another;

(Operating the resonance modules one at a time by) applying a measuring signal, preferably non-modulated, at the transmitter connection of the resonance module; Operating the tuning means of the resonance module past a resonance peak to a remote -3 dB point and then back to a nearby -3 dB point, while sensing the signal strength and identifying the points with, e.g., the RSSI function described above as well as recording the corresponding signal phases; Selecting a signal phase value, corresponding to the second phase difference above, as a predetermined target value in the future adjustment of the resonance module. The resonance module is tuned to resonance at a midpoint in the signal phase range between the -3 dB points. In this example, the -3 dB points in relation to a top signal strength are chosen for convenience and represent a phase difference of 90°. Other points than the -3 dB points and other means for signal strength measurement than the RSSI signal may be used.

Although the invention has been described in conjunction with preferred embodiments, it is to be understood that various modifications may be made without departing from the spirit and scope of the invention as defined by the appended claims.

CLAIMS

1. Method for tuning at least one tunable resonance module in a radio base station, said resonance module having tuning means, a transmitter connection, and an antenna connection, said method comprising the steps of:

- (a) mixing an input signal, originating from a transmitter signal present on the transmitter connection, with a low-frequency signal so as to generate a single side band signal,
- (b) mixing with the single side band signal an output signal being offset in phase from the input signal by a relative first phase difference dependent on a present tuning of the resonance module, said output signal being one in a group consisting of: a signal originating from an antenna signal present on the antenna connection, and a signal probed within the resonance module,
- (c) mixing the single side band signal with a signal originating from the transmitter signal on the transmitter connection,
- (d) comparing, at a frequency range about that of the low-frequency signal, mixing products resulting from the steps (b) and (c), respectively, so as to determine a relative second phase difference between the input and output signals,
- (e) operating, based on said second phase difference, the tuning means to tune the resonance module to a frequency of the transmitter signal present on the transmitter connection, so as to adjust said second phase difference to a predetermined value.

2. Method according to claim 1, wherein the step (a) further comprises mixing the input signal with the low-frequency signal in a quadrature modulator to generate the single-side-band signal, which is offset in frequency by a frequency difference between the low-frequency signal and the input signal.

3. Method according to claim 1, wherein the step (d) further comprises low-pass filtering the mixing product resulting from the mixings of the single side band signal with the input and the output signals, respectively, so as to block frequencies
5 above a frequency range about the low-frequency signal.

4. Method according to claim 1, further comprising multiplexing and processing further input and output signals of further resonance modules using common measurement circuitry and a
10 common signal processing unit.

5. Method according to claim 1, further comprising parallelly processing further input and output signals of further resonance modules using separate measurement circuitry and a
15 common signal processing unit.

6. Method according to claim 1, further comprising multiplexing signals to be mixed with the single-side-band signal.

7. System for carrying out the method of any of the preceding claims.


8. System for tuning at least one tunable resonance module in a radio base station, said tunable resonance module (1) having tuning means (3), a transmitter connection (4), and an antenna connection (5), said system comprising at least one single-side-band generator for forming a low-frequency measuring signal from an input signal and an output signal to and from said tunable resonance module, said measuring signal being
25 indicative of a phase difference between said input signal and said output signal.

9. System according to claim 8, wherein the single-side-band generator includes a sine-cosine signal generator means
35 comprising:

- first and second shift registers each having first and second groups of outputs, respectively,
- first and second outputs,

- first and second groups of resistors each resistor thereof being connected at the one side to one of the first and second groups of outputs and at the other side to the first and second output, respectively,
- 5 - first and second predetermined contents being shifted in the first and second registers, respectively, in cycles by clock pulses,
- duty cycles of the clock pulses, the predetermined contents, and values of the resistors being selected so
10 that sine and cosine signals, which have a phase difference of 90° , are generated at the first and second outputs, respectively.

1/2

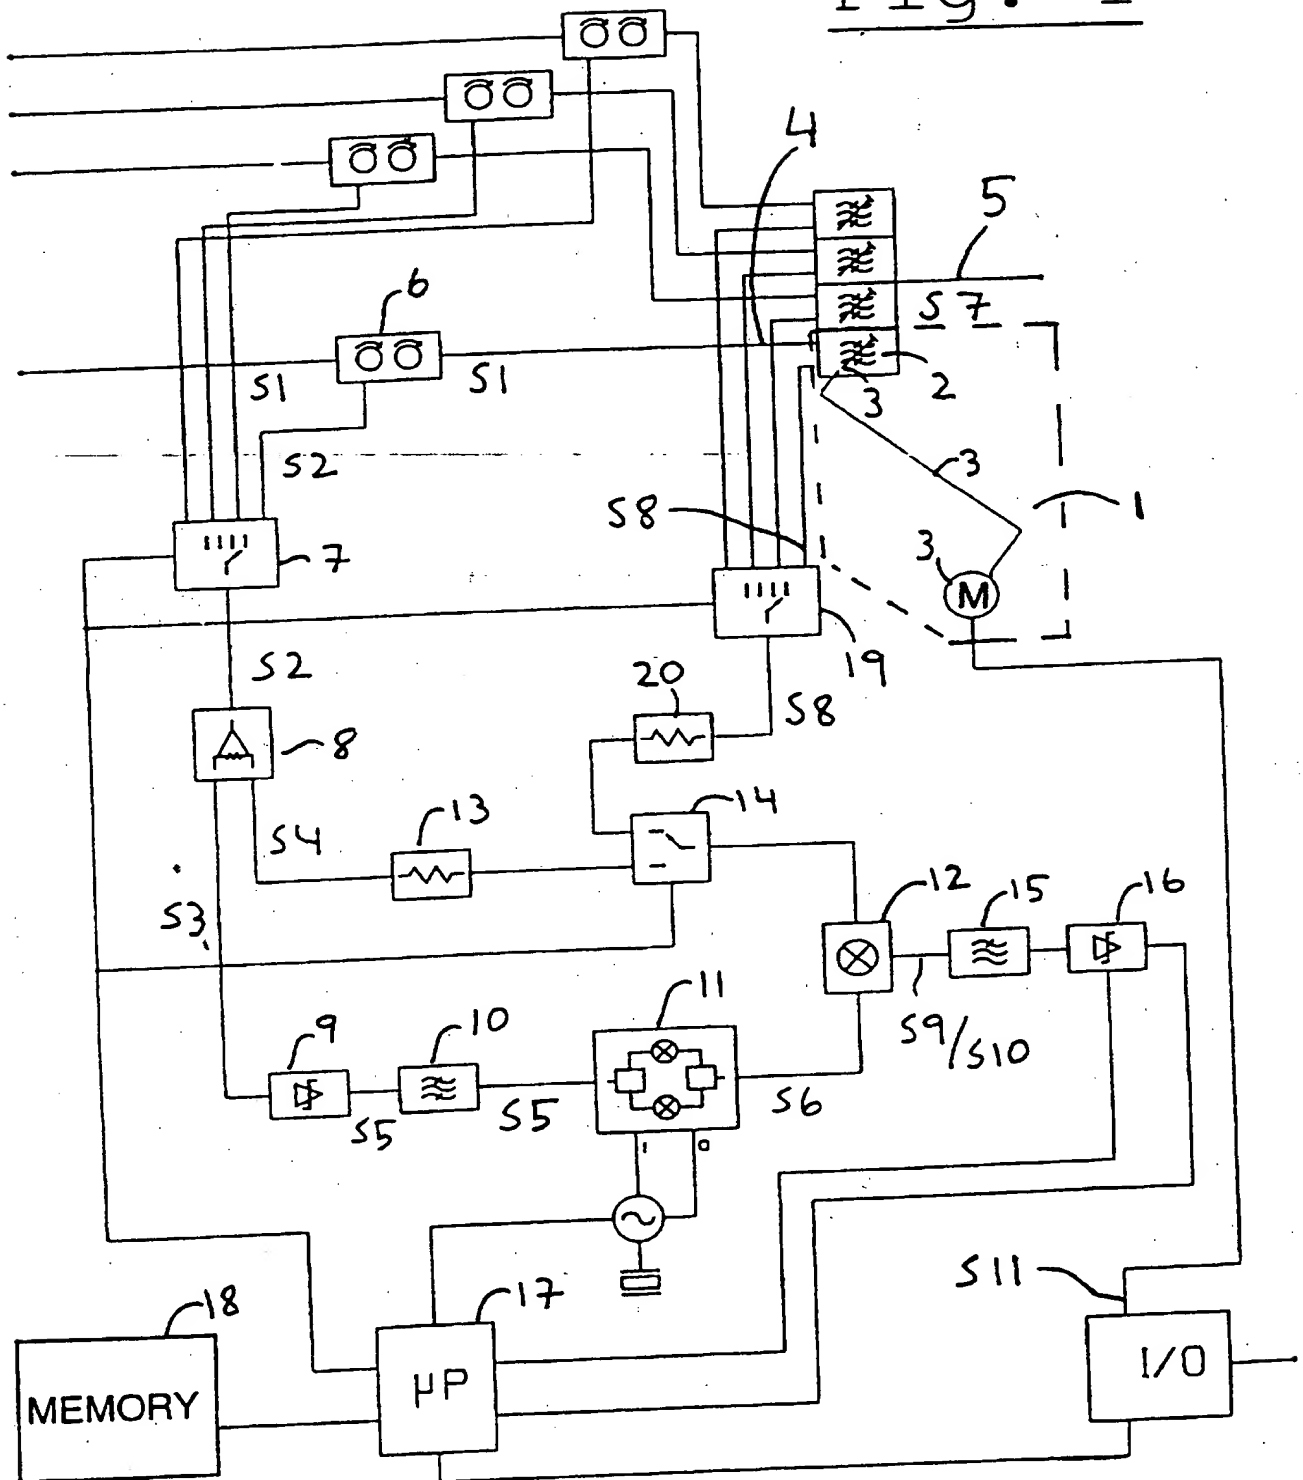Fig. 1

2/2

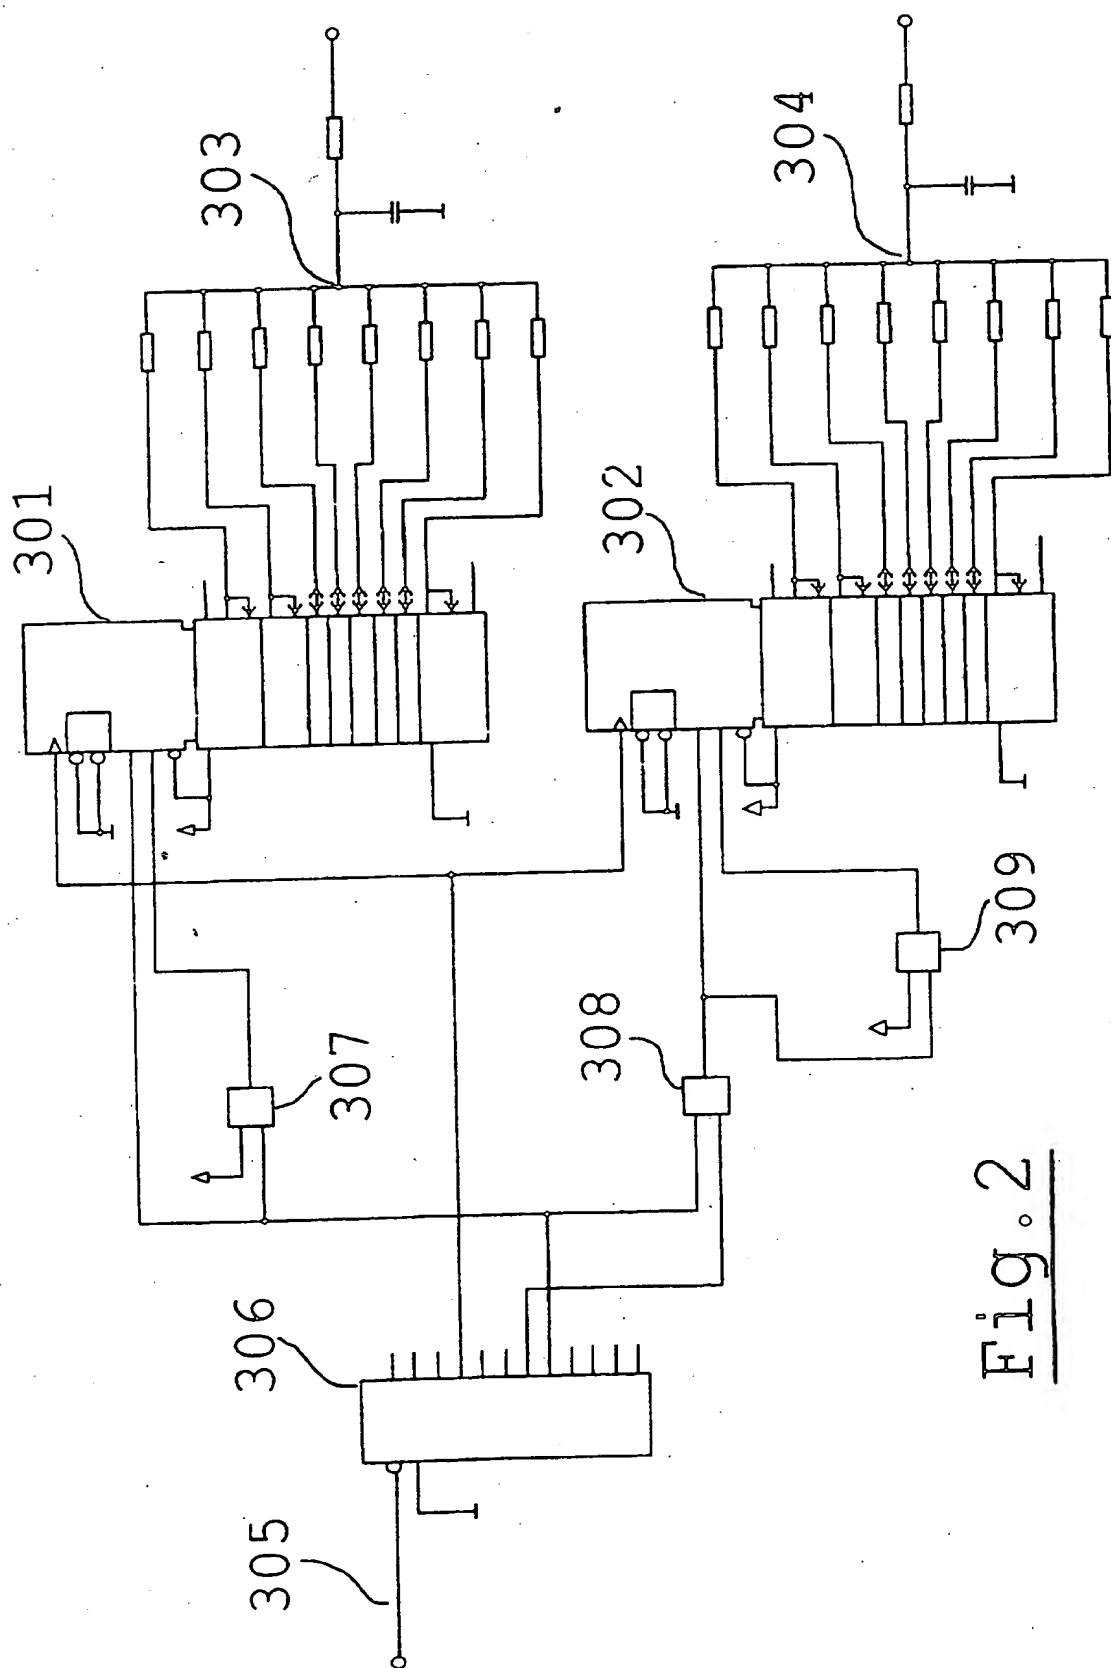


Fig. 2

1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 97/01125

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H03J 7/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H03J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, CLAIMS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3271684 A (A. SIMON), 6 Sept 1966 (06.09.66), column 1, line 31 - column 2, line 49 --	1-9
A	WO 9006627 A1 (ALLGON AB), 14 June 1990 (14.06.90), abstract --	1-9
A	WO 9212577 A1 (ALLGON AB), 23 July 1992 (23.07.92), cited in the application. -----	1-9

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *B* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the international search

26 November 1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

01 -12- 1997

Authorized officer

Rune Bengtsson
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 97/01125

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	3271684	A	06/09/66	DE 1269674 B	00/00/00
WO	9006627	A1	14/06/90	AT 140568 T	15/08/96
				DE 68926860 D,T	20/02/97
				EP 0447411 A,B	25/09/91
				ES 2090046 T	16/10/96
				SE 465054 B,C	15/07/91
				SE 8804374 A	02/12/88
				US 5408688 A	18/04/95
				SE 470325 B,C	17/01/94
				SE 8903298 A	07/04/91
WO	9212577	A1	23/07/92	DE 69104826 D,T	02/03/95
				DE 69215211 D,T	20/03/97
				EP 0513091 A,B	19/11/92
				EP 0566640 A,B	27/10/93
				NO 174022 C	02/03/94
				SE 467901 B,C	28/09/92
				SE 9100065 A	10/07/92
				US 5337648 A	16/08/94
				US 5374905 A	20/12/94

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)